Mini-Com® Flush Mount Modular **Patch Panels**



specifications

Flush mount modular patch panels shall consist of a metal panel with molded rear snap-in faceplates. Patch panels shall accept all Mini-Com® Modules for UTP, STP, fiber, or A/V applications and shall mount to standard 19" racks. Patch panels shall be available in 24-port and 48-port standard density and 48-port and 72-port high density. Flush mount patch panels shall be easy to identify with pre-numbered ports. Angled patch panels shall be designed at an optimum angle to help route the cable.



technical information

Mounting options:	Mounts to standard 19" rack
Material:	Stamping is CRS and faceplate is ABS
Packaging:	Packaged with appropriate pre-installed snap in faceplates and a set of mounting screws (#12-24 and M6)

key features and benefits

Modular	Accepts all Panduit Mini-Com® Modules to mix and match media types in the same panel
Angled design	Allows cable to flow to each side of the rack and minimize the need for horizontal cable managers by enabling patch cords to be routed directly into vertical cable managers which leads to increased closet density
Port and panel identification	Pre-numbered ports with write on areas (except 48-port high density)
Optional strain relief bars	To help support and manage cables
Optional filler panels	Flat and angled design fill unused rack openings to provide a clean and consistent look when used with any version of Panduit patch panels
Optional extender bracket	Allows 19" patch panels to be mounted on a 23" rack
High density	More modules per rack space

applications

Mini-Com® Flush Mount Modular Patch Panels are ideal for multi-media applications; they accept all Mini-Com® Modules. Flat and angled designs in various port densities available to fit most needs, include pre-numbered port identification. Angled patch panels are available for applications in which rack

space is limited. The design allows cable to flow to each side of the rack, minimizing the need for horizontal cable managers and increasing the density of the rack space. Flush mount patch panels can mount on a standard 19" rack or a 23" rack when using the extender brackets PEB1 or PEB2.

Mini-Com® Flat Flush Mount Patch Panels

24-port, 1 RU: CPP24FMWBLY 48-port, 2 RU: CPP48FMWBLY

Mini-Com® Flat Flush Mount High Density Patch Panels

48-port, 1 RU: CPP48HDWBLY' 48-port, 1 RU: CPP48HDEWBL 48-port, 1 RU: CPP48HDVNSWBL 72-port, 2 RU: CPP72FMWBLY

Mini-Com® Angled Flush Mount Patch Panels

24-port, 1 RU: CPPA24FMWBLY 48-port, 2 RU: CPPA48FMWBLY

Mini-Com® Analed Flush Mount High Density Patch Panels:

48-port. 1 RU: CPPA48HDWBLY* 48-port, 1 RU: CPPA48HDEWBL 48-port, 1 RU: CPPA48HDVNSWBL 72-port, 2 RU: CPPA72FMWBLY

Label Options for Standard Density Patch Panels

Laser/ink iet: C252X030FJJ TDP43ME: C252X030YPT

PanTher[™]

LS8E: C252X030FJC Cougar LS9: T031X000FJC-BK

Label Options for 72-Port High Density Patch Panels

Laser/ink jet: C261X030FJJ TDP43ME: C261X030YPT PanTher'

LS8E:

C261X030FJC Cougar LS9: T031X000FJC-BK

Strain Relief Bars

Straight: SRBS19BL-XY Extended. 2": SRB19BLY

With hook and

SRBM19BLY loop ties:

With adjustable

clips: **SRBWCY** Deep. 5": SRB19D5BLY Deep, 7": SRB19D7BLY SRB19MDBL Multi-depth:

Rack Filler Panels


See www.Panduit.com or catalog for rack filler panel options.

Extender Brackets


1 RU: PFB1 2 RU: PEB2


*Space not available for port labels.


Mini-Com® Flush Mount Modular Patch Panels

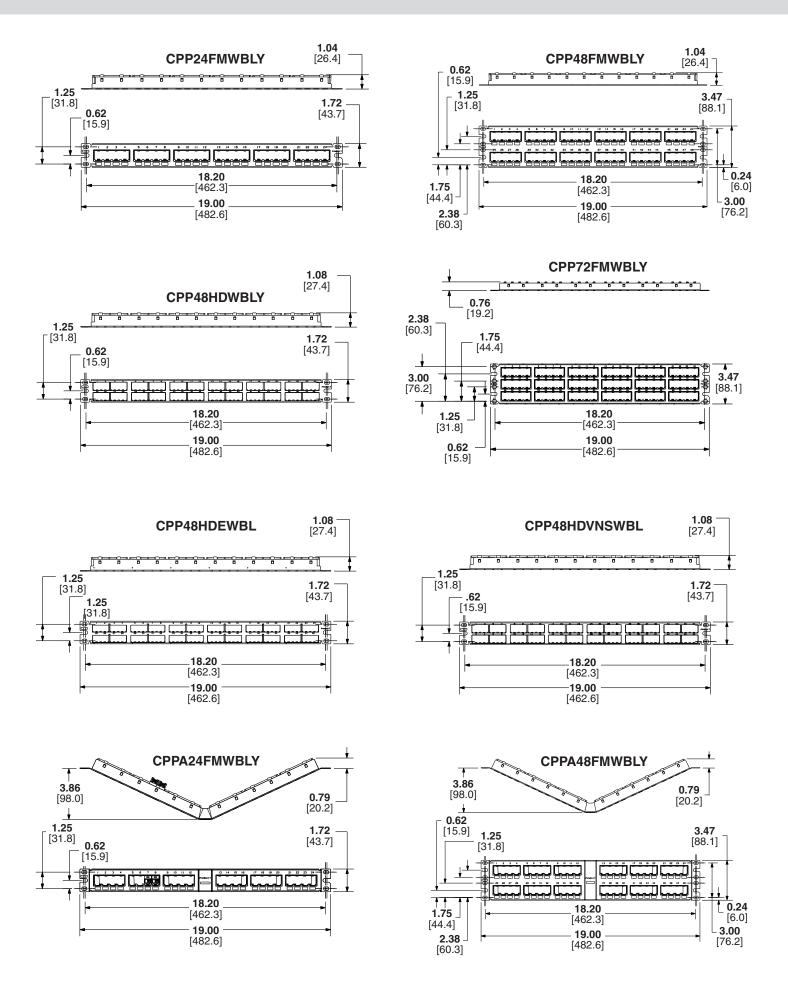


Mini-Com® Flush Mount Modular Patch Panels

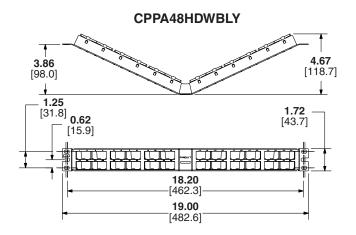

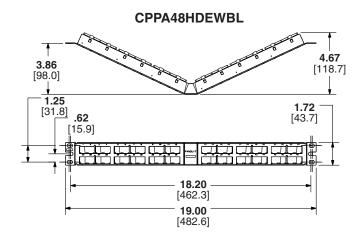

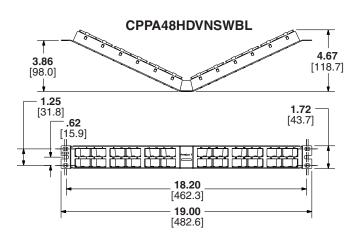

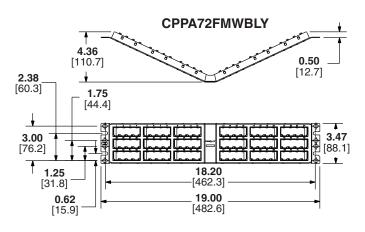

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575

PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty





Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 and reference OTSP25

©2011 Panduit Corp. ALL RIGHTS RESERVED. **WW-0TSP25** 9/2011

